

Artome S-Series

Projector Installation guide

This manual covers two product versions with different projector installation methods.

Identify your version by whether the rear access panel is present.



Product version with
rear access panel



Product version without
rear access panel


Artome S-Series

Projector Installation guide


Product version with rear access panel



1. Installer toolkit includes:
projector adapter, 2x thumb screws,
4x H3 screws, H3 tool

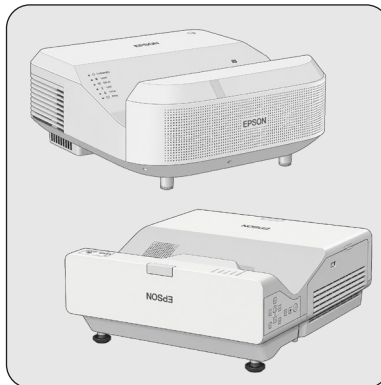


2. Compatible projector models:
Epson (PowerLite) EB-780E / 870E /
EB-770F / EB-775F / EB-760W

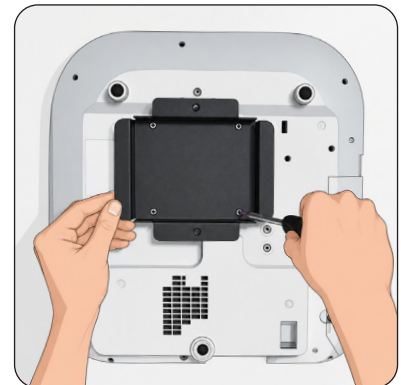

**3. Install the projector adapter using the
H3 screws.**



**4. Open the front door by pressing the
top left corner.**

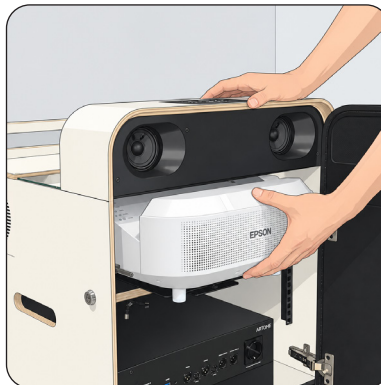


**5. Align the projector adapter with the
rails and slide the projector into place.**



**6. Secure the projector to the cabinet
with the two thumb screws.**




**7. Remove the rear panel to access
the projector cables.**

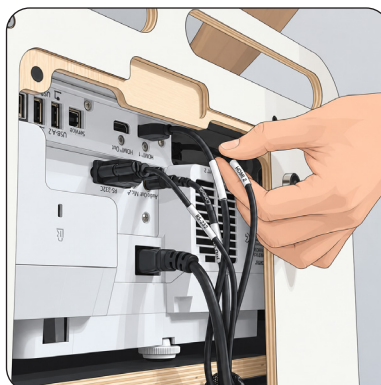

**8. Connect the cables to the
corresponding connectors on the
projector and close the rear panel.**

NOTE: Connector locations may vary
depending on the projector model.

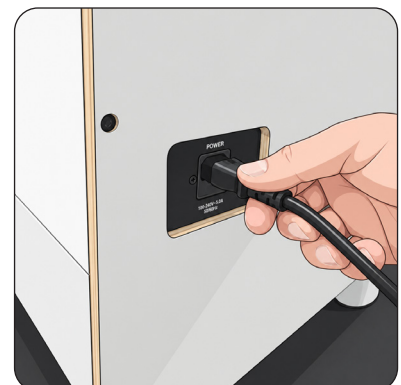


**9. Connect the power cable and turn
the unit on.**

NOTE: On first power-up, the unit runs
an automatic setup for approximately 2
minutes and shuts down when complete.


Artome S-Series

Projector Installation guide


Product version without rear access panel

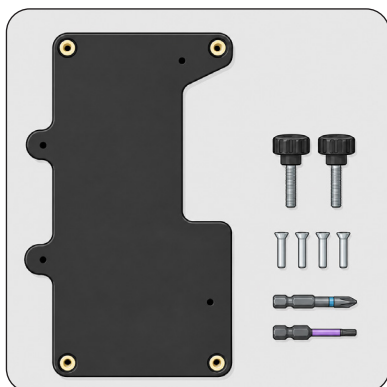

1. Installer toolkit includes:
Projector adapter, 2x thumb screws, 4x PH2 screws, H3 tool and PH2 tool.

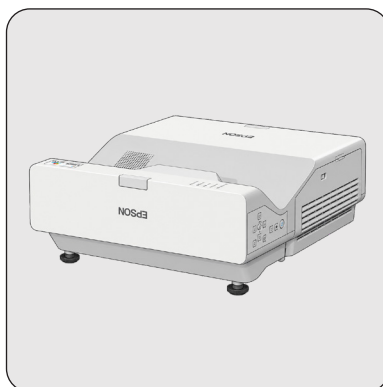


2. Compatible projector models:
Epson (PowerLite) EB-720/EB-725W/EB-735F/
EB-750F/EB-755F/EB-760W/EB-770F/EB-775F

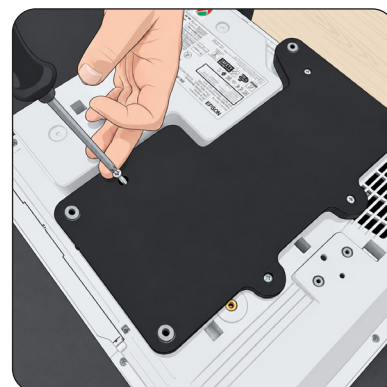


3. Install the projector adapter using PH2 tool.




4. Remove the back cover using the HEX3 tool.

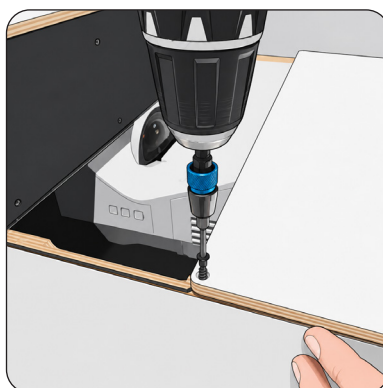

5. Remove the top cover using the HEX3 tool.

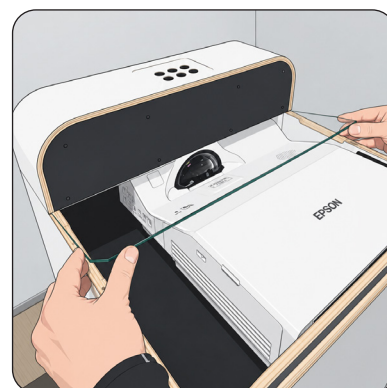

7. Mount the projector inside the cabinet.

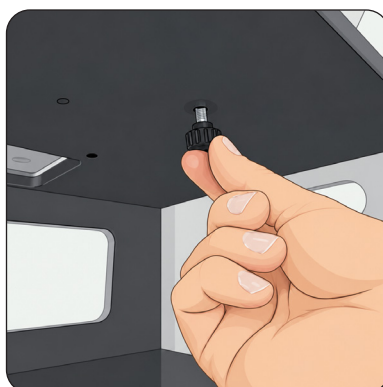

8. Secure the projector to the cabinet with the two thumb screws.



9. Connect the cables to the corresponding connectors on the projector and close the rear panel.


Artome S-Series

Projector Installation guide


Product version without rear access panel



10. Reinstall the glass.

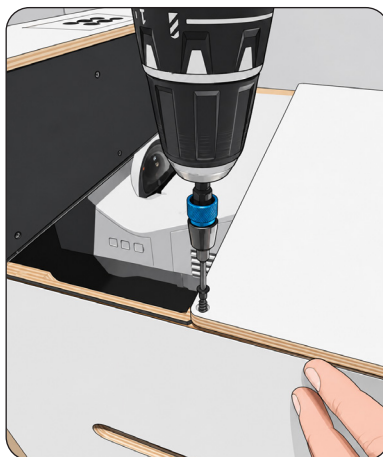


11. Reinstall the top cover.

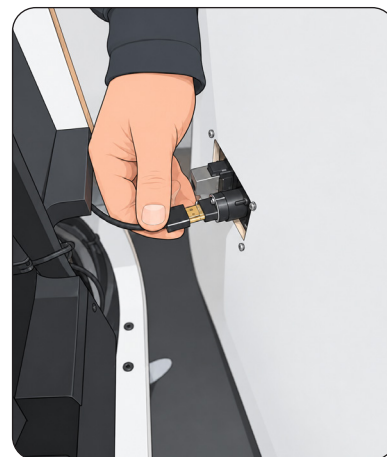

12. Connect HDMI 2 and 3.5 mm audio cables to the back cover.



13. Reinstall the back cover.

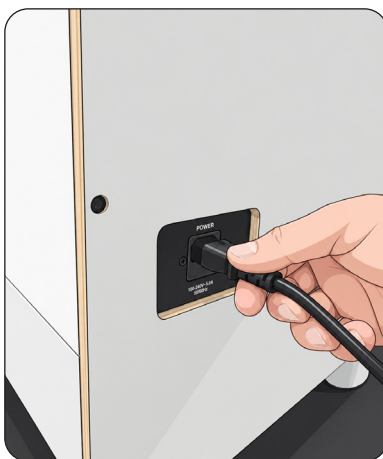

14. Connect the power cable.



15. Turn the unit on.

NOTE: On first power-up, the unit runs an automatic setup for approximately 2 minutes and shuts down when complete.