


## Artome X10M Projector Installation guide



1. Lock the wheels and open the front door

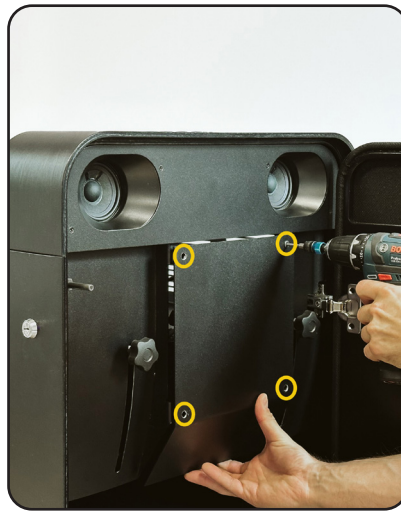

2. Unscrew the projector cable cover (HEX3)



3. Lock the angle adjustment to the Bottom position



4. Open the lens hatch. Remove the back cover (HEX3) and disconnect the pass-through cables



5. Extend the projector's legs well out before installation.



6. Carefully slide in the projector, align the back legs with the alignment holes, and tighten the legs.

# Artome X10M

## Projector Installation



7. Lock the angle adjustment to the top position and connect the cables to their corresponding projector connectors.



8. Secure the projector with the thumb screw: use hole 2 for ST models, and hole 1 for all others.



9. Connect the pass-through cables and install the back cover. Close the lens latch.



10. Install the cable cover and close the front door



11. Connect the power and turn on the unit



Wait 2 minutes for automatic configuration. The device turns off when ready.